

Declaration of conformity

n° 11311 / 2014

According to the results of the following tests:

EN 1335-1 test report n°180504-1/2014
EN 1335-2 test report n°180504-2/2014
EN 1335-2 test report n°180504-3/2014
EN 1335-3 test report n°180504-4/2014
EN 1335-3 test report n°180504-5/2014
EN 1335-3 test report n°180504-6/2014
EN 1335-3 test report n°180504-7/2014

we hereby testify that



FLASH swivel chair

of company

CERANTOLA S.P.A. - VIA GIORGIONE 2-ZONA IND.LE - 31037 RAMON DI LORIA (TV)

complies with the dimensional requirements of type B of EN 1335-1:2000
and with the safety requirements of EN 1335-2:2009
verified according to EN 1335-3:2009

This document is validated by digital signature and time stamping in accordance with the Italian laws and the European Directives which regulate the electronic signature systems.


Dott. Andrea Giavon

October 31st, 2014

Sample name is declared by the company who asked for the test. This report relates to the samples submitted for the test and no others. Additions, deletions or alterations are not permitted.

Date received: 14/07/14

Date of issue: 31/10/14

Report consists of 7 test reports.

Defects before testing: None

Sample name: FLASH swivel chair

CERANTOLA S.P.A.
VIA GIORGIONE 2-ZONA IND.LE
31037 RAMON DI LORIA (TV)
ITALIA

SAMPLE N° 180504

Overall dimensions: 660 x 660 x 1120 (h) mm

List performed tests:

1. Office work chair: dimensions EN 1335-1:2000 AC:2002
2. General design requirements EN 1335-2:2009, clause 4.1
3. Information for use EN 1335-2:2009, clause 5
4. Seat and back static load test 1335-3:2009 AC:2009, clause 7.2.1-7.2.2
5. Seat and back durability - EN 1335-3:2009 AC:2009 - Clause 7.3.1
6. Stability EN 1335-3:2009 AC:2009, clause 7.1
7. Rolling resistance of unloaded chair EN 1335-3:2009 AC:2009, clause 7.4



This document is validated by digital signature and time stamping in accordance with the Italian laws and the European Directives which regulate the electronic signature systems.

Managing Director
Dr. Andrea Giavon


The sample name and, when relevant, its description, are given by the orderer, and CATAS does not assume responsibility on this matter. This test report relates to the sample submitted for the test and no others. Additions, deletions or alterations are not permitted. This test report must always be reproduced in its entirety. Unless otherwise stated, sampling has been carried out by the orderer.



centro ricerche-sviluppo e laboratori prove
settori legno-arredo, ambiente e alimenti

CATAS S.p.A.
Iscr. Reg. Imprese Udine
nr. iscr. C.F. 01818850305
Reg. Impr. UD 20663
P. IVA : 01818850305
C.Soc. € 1.003.650,00 i.v.

Sede: Via Antica, 24/3
33048 S. Giovanni al Nat. UD
Tel. 0432.747211 r.a.
Fax 0432.747250
<http://www.catas.com>
e-mail: lab@catas.com

Filiale:
Via Braille, 5
20851 Lissone MB
Tel. 039.464567
Fax 039.464565
e-mail: lissone@catas.com

SAMPLE N° 180504


Date of issue: 31/10/14
Sample weight: Not determined
Sample name: FLASH swivel chair



Side view



Rear view

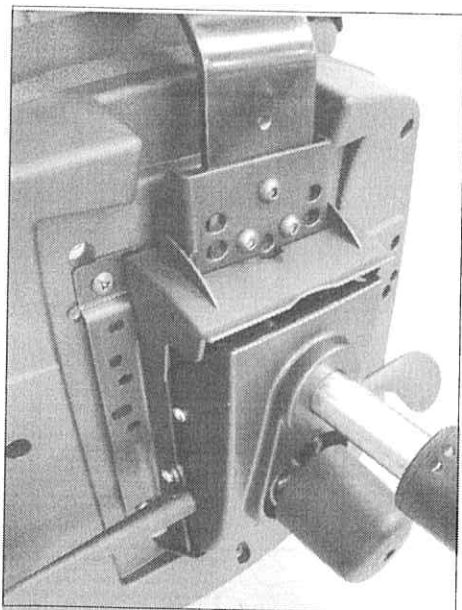

Bottom view

The sample name and, when relevant, its description, are given by the orderer, and CATAS does not assume responsibility on this matter. This test report relates to the sample submitted for the test and no others. Additions, deletions or alterations are not permitted. This test report must always be reproduced in its entirety. Unless otherwise stated, sampling has been carried out by the orderer.

TEST REPORT
180504 / 1

Date received: 14/07/14
Date of test: 23/07/14
Date of issue: 31/10/14



Sample name: FLASH swivel chair

CERANTOLA S.P.A.
VIA GIORGIONE 2-ZONA IND.LE
31037 RAMON DI LORIA (TV)
ITALIA

Office work chair: dimensions EN 1335-1:2000 AC:2002

1. General features

1.1 Seat

depht: - adjustable with
horizontal movement
x fixed

inclination: - fixed
x adjustable

1.2 Backrest

heigth: - fixed
x adjustable
- adjustable lumbar support

inclination: - fixed
x adjustable

1.3 Seat and back synchronized

Yes

This document is validated by digital signature and time stamping in accordance with the Italian laws and the European Directives which regulate the electronic signature systems.

Managing Director
Dr. Andrea Giavon

The sample name and, when relevant, its description, are given by the orderer, and CATAS does not assume responsibility on this matter. This test report relates to the sample submitted for the test and no others. Additions, deletions or alterations are not permitted. This test report must always be reproduced in its entirety. Unless otherwise stated, sampling has been carried out by the orderer.

TEST REPORT **180504 / 1**
Date of issue: **31/10/14**
Sample name: **FLASH swivel chair**

Type of chair: B

Test Results:

All linear dimensions are in mm

symbol	Parameter	requirement	measured	conformity
SEAT				
a	seat height	420 to 510	419,1 ± 0,7* to 537	yes
	adjustment range	100 min	117,9	yes
b	seat depth - non adjustable	380 ÷ 440	430	yes
	seat depth - adjustable	400 to 420	/	/
	adjustment range	50 min	/	/
c	depth of seat surface	380 min	460	yes
d	seat width	400 min	475	yes
e	inclination of seat surface - non adjustable	-2° ÷ - 7°	/	/
	inclination of seat surface - adjustable	-2° to - 7°	2° to - 12°	yes
BACK REST				
f	height of the back supporting point "S" non adjust.	170 ÷ 220	/	/
	height of the back supporting point "S" adjust.	170 to 220	166,2 ± 0,7* to 224,3 ± 0,7*	yes
	adjustment range	50 min	58,1	yes
g	height of the back pad - adjustable in height	220 min	480	yes
	height of the back pad - non adjustable in height	260 min	/	/
h	height of the upper edge of the back rest	360 min	487	yes
i	back rest width	360 min	408	yes
k	horizontal radius of the back rest	400 min	> 400	yes
l	back rest inclination (adjustment range)	15° min	20	yes
ARM REST				
n	length of arm rest	200 min	/	/
o	width of arm rest	40 min	/	/
p	height of armrest - adjustable	200 to 250	/	/
	height of armrest - non adjustable	200 ÷ 250	/	/
q	distance from the front of the arm rest to the front edge of the seat	100 min	/	/
r	clear width between the arm rests	460 ÷ 510	/	/
UNDERFRAME				
s	maximum offset of the underframe	415 max	370	yes
t	stability dimension	195 min	244	yes

*The result is the average of 3 measures

Unless otherwise specified, measurement uncertainties expanded to a confidence level of about 95% are ±5 mm for linear measures, ±2° for angles, ±10mm for the height of the back supporting point "S".

The measurement uncertainties stated in this document have been determined according to UNI CEI ENV 13005:2000. They were estimated as expanded uncertainty obtained multiplying the standard uncertainty by the coverage factor k corresponding to a confidence level of about 95%. Normally k=2.

NOTE: the back supporting point has been determined setting the back rest in its most upright position because the method described in EN 1335-1:2000 clause 3.6 is not applicable.

This document is validated by digital signature and time stamping in accordance with the Italian laws and the European Directives which regulate the electronic signature systems.


Managing Director
Dr. Andrea Giavon

TEST REPORT
180504 / 2

Date received: 14/07/14
Date of test: 05/08/14
Date of issue: 31/10/14



Sample name: FLASH swivel chair

CERANTOLA S.P.A.
VIA GIORGIONE 2-ZONA IND.LE
31037 RAMON DI LORIA (TV)
ITALIA

General design requirements EN 1335-2:2009, clause 4.1

Requirements	Remarks
a) Parts in contact by user: Distance of accessible movable parts shall be either ≤ 8 mm e ≥ 25 mm in any position during movement.	Yes
b) Corners and edges in contact by user: Minimum radius of corners and edges: 2 mm	Yes
c) Edges of handles: Minimum radius of handle edges: 2 mm	Yes
d) All other edges: Rounded or chamfered:	Yes
e) Ends of hollow components: Closed or capped	Yes
f) It shall be possible to operate the adjusting devices from sitting position in the chair:	Yes
g) It shall not be possible for any load bearing part to come loose unintentionally:	Yes
h) Lubricated parts: All parts wich are lubricated shall be protected	Yes

This document is validated by digital signature and time stamping in accordance with the Italian laws and the European Directives which regulate the electronic signature systems.

Managing Director
Dr. Andrea Giavon

The sample name and, when relevant, its description, are given by the orderer, and CATAS does not assume responsibility on this matter. This test report relates to the sample submitted for the test and no others. Additions, deletions or alterations are not permitted. This test report must always be reproduced in its entirety. Unless otherwise stated, sampling has been carried out by the orderer.

TEST REPORT

180504 / 3

Date received: 14/07/14
Date of test: 27/10/14
Date of issue: 31/10/14



Sample name: FLASH swivel chair

CERANTOLA S.P.A.
VIA GIORGIONE 2-ZONA IND.LE
31037 RAMON DI LORIA (TV)
ITALIA

Information for use EN 1335-2:2009, clause 5

Statement checked	Remarks
Information for use in the language of the country in which the chair will be delivered to the end user.	Italian language
Information regarding the intended use.	Present
Information regarding possible adjustments and chair type	Present
Instruction for operating the adjusting mechanisms.	Present
Instruction for the care and the maintenance of the chair.	Present
Information regarding adjustment of the seat and back rest.	Present
Advice that only trained personnel may replace or repair seat height adjustment components with energy accumulators.	Present
Information on the choice of castors in relation to the floor surface.	Present

This document is validated by digital signature and time stamping in accordance with the Italian laws and the European Directives which regulate the electronic signature systems.

Managing Director
Dr. Andrea Giavon

The sample name and, when relevant, its description, are given by the orderer, and CATAS does not assume responsibility on this matter. This test report relates to the sample submitted for the test and no others. Additions, deletions or alterations are not permitted. This test report must always be reproduced in its entirety. Unless otherwise stated, sampling has been carried out by the orderer.

TEST REPORT

180504 / 4

Date received: 14/07/14
Date of test: 17/09/14
Date of issue: 31/10/14



Sample name: FLASH swivel chair

CERANTOLA S.P.A.
VIA GIORGIONE 2-ZONA IND.LE
31037 RAMON DI LORIA (TV)
ITALIA

Seat and back static load test 1335-3:2009 AC:2009, clause 7.2.1-7.2.2

Seat front edge static load, clause 7.2.1


Seat height: highest position
Seat depth: foremost position

Test results:

Seat load N	Number of cycles	Back rest inclination mechanism	Remarks
1.600	10	F	No defects

Seat and back static load test, clause 7.2.2

Seat height: highest position
Seat inclination: horizontal
Back rest in height: highest position
Back rest in depth: rearmost position
Position of castors: perpendicular to the base arms
Tension of mechanism spring: medium



Test results:

Seat load N	Back force N	Number of cycles	Loading point	Back rest inclination mechanism	Remarks
1.600	560	5	A - B	Blocked	No defects
1.600	560	5	A - B	Unlocked	No defects

This document is validated by digital signature and time stamping in accordance with the Italian laws and the European Directives which regulate the electronic signature systems.

Managing Director
Dr. Andrea Giavon

The sample name and, when relevant, its description, are given by the orderer, and CATAS does not assume responsibility on this matter. This test report relates to the sample submitted for the test and no others. Additions, deletions or alterations are not permitted. This test report must always be reproduced in its entirety. Unless otherwise stated, sampling has been carried out by the orderer.

TEST REPORT
180504 / 5

Date received: 14/07/14
Date of test: 17/09/14
Date of issue: 31/10/14




CERANTOLA S.P.A.
VIA GIORGIONE 2-ZONA IND.LE
31037 RAMON DI LORIA (TV)
ITALIA

Sample name: FLASH swivel chair

Seat and back durability - EN 1335-3:2009 AC:2009 - Clause 7.3.1

Seat and back durability clause 7.3.1

Seat height: highest position
Seat inclination: horizontal
Back rest in height: highest position
Back rest in depth: rearmost position
Position of castors: perpendicular to the base arms
Tension of mechanism spring: medium

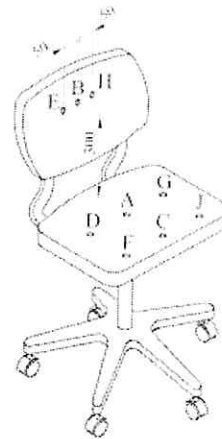

Test results:

Number of cycles	Loading point	Force N	Back rest inclination mechanism	Remarks
120.000	A	1.500	Locked	No defects
40.000	C B	1200 320	Locked	No defects
40.000	C B	1200 320	Unlocked	No defects
20.000	J E	1200 320	Unlocked	No defects
20.000	F H	1200 320	Unlocked	No defects
20.000	D G	1100 1100	Unlocked	No defects

This document is validated by digital signature and time stamping in accordance with the Italian laws and the European Directives which regulate the electronic signature systems.

Managing Director
Dr. Andrea Giovan

The sample name and, when relevant, its description, are given by the orderer, and CATAS does not assume responsibility on this matter. This test report relates to the sample submitted for the test and no others. Additions, deletions or alterations are not permitted. This test report must always be reproduced in its entirety. Unless otherwise stated, sampling has been carried out by the orderer.

TEST REPORT

180504 / 6

Date received: 14/07/14
Date of test: 10/10/14
Date of issue: 31/10/14



Sample name: FLASH swivel chair

GERANTOLA S.P.A.
VIA GIORGIONE 2-ZONA IND.LE
31037 RAMON DI LORIA (TV)
ITALIA

Stability EN 1335-3:2009 AC:2009, clause 7.1

Chairs with back rest inclination: no overturning with 13 discs of 10 Kg.

Positioning of chair components: as specified in Table 1 of EN 1335-3

Forwards overturning

Horizontal force : 20 N does not overturn

Front edge overturning

Horizontal force : 27 kg does not overturn

Rearwards overturning

Fixed back chair

Horizontal force : /

Chair with back rest inclination

Loading discs on the seat : 13 does not overturn

Sideways overturning for chairs with arms

Horizontal force : /

Sideways overturning for chairs without arms

Horizontal force : 20 N does not overturn

Forwards overturning for chairs with footrest

Horizontal force : /

This document is validated by digital signature and time stamping in accordance with the Italian laws and the European Directives which regulate the electronic signature systems.

Managing Director
Dr. Andrea Giovan

The sample name and, when relevant, its description, are given by the orderer, and CATAS does not assume responsibility on this matter. This test report relates to the sample submitted for the test and no others. Additions, deletions or alterations are not permitted. This test report must always be reproduced in its entirety. Unless otherwise stated, sampling has been carried out by the orderer.

TEST REPORT

180504 / 7

Date received: 14/07/14
Date of test: 10/10/14
Date of issue: 31/10/14



Sample name: FLASH swivel chair

CERANTOLA S.P.A.
VIA GIORGIONE 2-ZONA IND.LE
31037 RAMON DI LORIA (TV)
ITALIA

Rolling resistance of unloaded chair EN 1335-3:2009 AC:2009, clause 7.4

Rolling resistance of unloaded chair, clause 7.4

Type of castors: H
Test surface: steel floor
Test speed: 50 mm/s
Seat height: lowest position

Test results:

Measured resistance of castors N	Minimum allowed resistance N	Remarks
15	12	No defects

Unless otherwise specified, measurement uncertainty expanded to a confidence level of about 95% are $\pm 2,0$ N.

The measurement uncertainties stated in this document have been determined according to UNI CEI ENV 13005:2000. They were estimated as expanded uncertainty obtained multiplying the standard uncertainty by the coverage factor k corresponding to a confidence level of about 95%. Normally k=2.

This document is validated by digital signature and time stamping in accordance with the Italian laws and the European Directives which regulate the electronic signature systems.

Measuring Director
Dr. Andrea Giavon

The sample name and, when relevant, its description, are given by the orderer, and CATAS does not assume responsibility on this matter. This test report relates to the sample submitted for the test and no others. Additions, deletions or alterations are not permitted. This test report must always be reproduced in its entirety. Unless otherwise stated, sampling has been carried out by the orderer.



31037 RAMON DI LORIA (TV) ITALY - Via Giorgione, 2 (z.i.)
Tel: +39.0423.755013 - Fax: +39.0423.755152 - R.E.A. TV 190527
Reg. Imp. TV n. 02143740260 - C. Id. IVACEEn. IT 02143740260
Cap. Soc. € 120.000,00 i.v. - E-mail: info@cerantola.com
Web site: www.cerantola.com

ISTRUZIONI D'USO SEDIA FLASH

Poltrona operativa per ufficio girevole per postazione con videoterminale. La poltrona prevede la regolazione in altezza di sedile e schienale, la regolazione dell'inclinazione dello schienale con leva e bloccaggio a posizione desiderata oppure sbloccato a contatto permanente. La poltrona prevede la regolazione della profondità del sedile tramite bloccaggio con leva.

ISTRUZIONI D'USO:

- Regolazione in altezza del sedile con pistone a gas, tirando verso l'alto la leva del meccanismo synchro.
- Sbloccaggio della regolazione in altezza dello schienale spingendo verso l'alto
- Per riportare lo schienale nella posizione più bassa, spingerlo fino alla massima altezza e quindi verso il basso
- Per regolare la profondità del sedile tirare verso l'alto l'apposita leva.

INFORMAZIONI GENERALI:

- Se la poltrona è prevista per uso a videoterminale gli angoli tra piede e polpaccio, polpaccio e coscia, coscia e schiena, avambraccio e spalla devono essere di circa 90°.
- Per l'utilizzo della sedia su pavimenti in linoleum o ricoperti da moquette o tappeti si consiglia l'uso di ruote rigide; per pavimenti in pietra dura, legno o piastrelle si consiglia l'uso di ruote morbide.

CONSIGLI DI MANUTENZIONE:

- Le parti rivestite in tessuto vanno pulite con una spazzola o un detergente delicato.
- Le parti rivestite con pelle naturale o artificiale devono essere pulite con un panno umido e morbido
- Tutte le parti devono essere pulite con una spazzola o con un panno umido
- EVITARE TASSATIVAMENTE l'uso di solventi o di detersivi chimici, poiché potrebbero alterare le caratteristiche estetiche e fisiche dell'articolo.

CONSIGLI DI SICUREZZA:

- Non salire in piedi sulla poltrona
- Non sedersi sulla spalliera o sui braccioli.
- Evitare il contatto con fonti di calore

- Il prodotto non è adatto ad uso esterno.
- Le sedie vanno movimentate dai braccioli
- Si consiglia di effettuare una periodica ispezione dei componenti
- Non inserire le mani nelle eventuali parti in movimento accessibili durante l'uso
- Non aprire la colonna a gas con la forza. Solo personale specializzato può sostituire o riparare la colonna a gas.

**La sedia rispetta i requisiti della norma En 1335-1 tipologia A

Attestazione di Conformità al Decreto Legislativo n° 81 del 09-04-2008
e successive integrazioni ed aggiornamenti
Attestazione n° 1306/2014

Valutati i risultati ottenuti nelle prove secondo le
norme:

UNI EN 1335-1 protocollo n°180503-1/2014
UNI EN 1335-2 protocollo n°180503-2/2014
UNI EN 1335-2 protocollo n°180503-3/2014
UNI EN 1335-3 protocollo n°180503-4/2014
UNI EN 1335-3 protocollo n°180503-5/2014
UNI EN 1335-3 protocollo n°180503-6/2014
UNI EN 1335-3 protocollo n°180503-7/2014

Constatato che il campione esaminato é dotato di
sedile regolabile in altezza, di schienale regolabile
in altezza ed inclinazione e risponde alla tipologia
B della EN 1335-1,

attestiamo che la



**FLASH swivel chair with mesh backrest
della ditta**

CERANTOLA S.P.A. - VIA GIORGIONE 2-ZONA IND.LE - 31037 RAMON DI LORIA (TV)

**rispetta i requisiti minimi al paragrafo 1 punto e) dell'allegato XXXIV
del Decreto Legislativo n° 81 del 09-04-2008**

*Il documento in formato PDF è stato sottoscritto con firma digitale e marca
temporale nel rispetto del codice dell'amministrazione digitale (D.Lgs n° 82 e D.Lgs.
n° 159), della deliberazione CNIPA n° 2005 del febbraio 2005 e dell'intesa Adobe-
Cnipa del febbraio 2006.*

*Il Direttore
dott. Andrea Giavon*

28 Novembre 2014

La denominazione del campione é quella dichiarata dalla ditta richiedente. Questa attestazione di conformità riguarda il campione sottoposto a prova e solo esso. Aggiunte, cancellazioni o alterazioni non sono ammesse.

SAMPLE N° 180503


Date of issue: 28/11/14
Sample weight: Not determined
Sample name: FLASH swivel chair with mesh backrest



Side view



Rear view

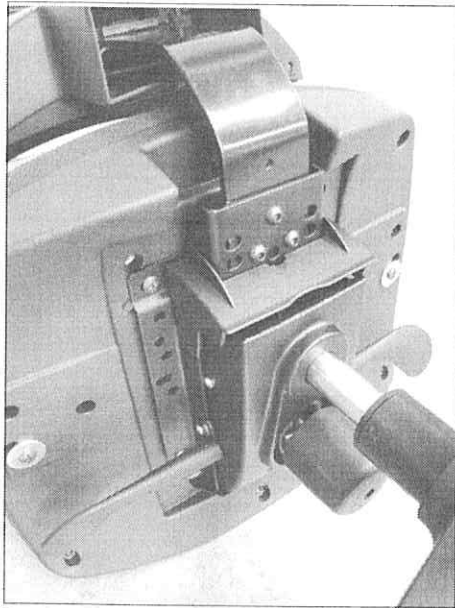

Bottom view

The sample name and, when relevant, its description, are given by the orderer, and CATAS does not assume responsibility on this matter. This test report relates to the sample submitted for the test and no others. Additions, deletions or alterations are not permitted. This test report must always be reproduced in its entirety. Unless otherwise stated, sampling has been carried out by the orderer.

TEST REPORT**180503 / 1**Date received: 14/07/14
Date of test: 27/10/14
Date of issue: 28/11/14CERANTOLA S.P.A.
VIA GIORGIONE 2-ZONA IND.LE
31037 RAMON DI LORIA (TV)
ITALIA

Sample name: FLASH swivel chair with mesh backrest

Office work chair: dimensions EN 1335-1:2000 AC:2002**1. General features****1.1 Seat**depth: - adjustable with
horizontal movement
x fixedinclination: - fixed
x adjustable**1.2 Backrest**height: - fixed
x adjustable
- adjustable lumbar supportinclination: - fixed
x adjustable**1.3 Seat and back synchronized**

Yes

This document is validated by digital signature and time stamping in accordance with the Italian laws and the European Directives which regulate the electronic signature systems.

Managing Director
Dr. Andrea Giavon

The sample name and, when relevant, its description, are given by the orderer, and CATAS does not assume responsibility on this matter. This test report relates to the sample submitted for the test and no others. Additions, deletions or alterations are not permitted. This test report must always be reproduced in its entirety. Unless otherwise stated, sampling has been carried out by the orderer.

TEST REPORT

180503 / 1

Date of issue:

28/11/14

Sample name:

FLASH swivel chair with mesh backrest

Type of chair: B

Test Results:

All linear dimensions are in mm

symbol	Parameter	requirement	measured	conformity
SEAT				
a	seat height	420 to 510	410 to 530	yes
	adjustment range	100 min	120	yes
b	seat depth - non adjustable	380 ÷ 440	412	yes
	seat depth - adjustable	400 to 420	/	yes
	adjustment range	50 min	/	yes
c	depth of seat surface	380 min	448	yes
d	seat width	400 min	461	yes
e	inclination of seat surface - non adjustable	-2° ÷ - 7°	/	yes
	inclination of seat surface - adjustable	-2° to - 7°	2 to -11	yes
BACK REST				
f	height of the back supporting point "S" non adjust.	170 ÷ 220	/	yes
	height of the back supporting point "S" adjust.	170 to 220	168,1 - 0,8* to 226,4- 0,8*	yes
	adjustment range	50 min	58,3	yes
g	height of the back pad - adjustable in height	220 min	551	yes
	height of the back pad - non adjustable in height	260 min	/	yes
h	height of the upper edge of the back rest	360 min	594	yes
i	back rest width	360 min	422	yes
k	horizontal radius of the back rest	400 min	> 400	yes
l	back rest inclination (adjustment range)	15° min	21	yes
ARM REST				
n	length of arm rest	200 min	/	yes
o	width of arm rest	40 min	/	yes
p	height of armrest - adjustable	200 to 250	/	yes
	height of armrest - non adjustable	200 ÷ 250	/	yes
q	distance from the front of the arm rest to the front edge of the seat	100 min	/	yes
r	clear width between the arm rests	460 ÷ 510	/	yes
UNDERFRAME				
s	maximum offset of the underframe	415 max	369	yes
t	stability dimension	195 min	243	yes


*The result is the average of 3 measures

Unless otherwise specified, measurement uncertainties expanded to a confidence level of about 95% are ±5 mm for linear measures, ±2° for angles, ±10mm for the height of the back supporting point "S".

The measurement uncertainties stated in this document have been determined according to UNI CEI ENV 13005:2000. They were estimated as expanded uncertainty obtained multiplying the standard uncertainty by the coverage factor k corresponding to a confidence level of about 95%. Normally k=2.

NOTE: the back supporting point has been determined setting the back rest in its most upright position because the method described in EN 1335-1:2000 clause 3.6 is not applicable.

This document is validated by digital signature and time stamping in accordance with the Italian laws and the European Directives which regulate the electronic signature systems.


Managing Director
Dr. Andrea Giavon

TEST REPORT 180503 / 2

Date received: 14/07/14
Date of test: 27/10/14
Date of issue: 28/11/14



GERANTOLA S.P.A.
VIA GIORGIONE 2-ZONA IND.LE
31037 RAMON DI LORIA (TV)
ITALIA

Sample name: FLASH swivel chair with mesh backrest

General design requirements EN 1335-2:2009, clause 4.1

Requirements	Remarks
a) Parts in contact by user: Distance of accessible movable parts shall be either ≤ 8 mm e ≥ 25 mm in any position during movement.	Yes
b) Corners and edges in contact by user: Minimum radius of corners and edges: 2 mm	Yes
c) Edges of handles: Minimum radius of handle edges: 2 mm	Yes
d) All other edges: Rounded or chamfered:	Yes
e) Ends of hollow components: Closed or capped	Yes
f) It shall be possible to operate the adjusting devices from sitting position in the chair:	Yes
g) It shall not be possible for any load bearing part to come loose unintentionally:	Yes
h) Lubricated parts: All parts wich are lubricated shall be protected	Yes

This document is validated by digital signature and time stamping in accordance with the Italian laws and the European Directives which regulate the electronic signature systems.

*Managing Director
Dr. Andrea Cavan*

The sample name and, when relevant, its description, are given by the orderer, and CATAS does not assume responsibility on this matter. This test report relates to the sample submitted for the test and no others. Additions, deletions or alterations are not permitted. This test report must always be reproduced in its entirety. Unless otherwise stated, sampling has been carried out by the orderer.

TEST REPORT

180503 / 3

Date received: 14/07/14
Date of test: 27/10/14
Date of issue: 28/11/14



Sample name: FLASH swivel chair with mesh backrest

CERANTOLA S.P.A.
VIA GIORGIONE 2-ZONA IND.LE
31037 RAMON DI LORIA (TV)
ITALIA

Information for use EN 1335-2:2009, clause 5

Statement checked	Remarks
Information for use in the language of the country in which the chair will be delivered to the end user.	Italian language
Information regarding the intended use.	Present
Information regarding possible adjustments and chair type	Present
Instruction for operating the adjusting mechanisms.	Present
Instruction for the care and the maintenance of the chair.	Present
Information regarding adjustment of the seat and back rest.	Present
Advice that only trained personnel may replace or repair seat height adjustment components with energy accumulators.	Present
Information on the choice of castors in relation to the floor surface.	Present

This document is validated by digital signature and time stamping in accordance with the Italian laws and the European Directives which regulate the electronic signature systems.

Managing Director
Dr. Andrea Giavon

The sample name and, when relevant, its description, are given by the orderer, and CATAS does not assume responsibility on this matter. This test report relates to the sample submitted for the test and no others. Additions, deletions or alterations are not permitted. This test report must always be reproduced in its entirety. Unless otherwise stated, sampling has been carried out by the orderer.

TEST REPORT
180503 / 4

Date received: 14/07/14
Date of test: 30/10/14
Date of issue: 28/11/14



CERANTOLA S.P.A.
VIA GIORGIONE 2-ZONA IND.LE
31037 RAMON DI LORIA (TV)
ITALIA

Sample name: FLASH swivel chair with mesh backrest

Seat and back static load test 1335-3:2009 AC:2009, clause 7.2.1-7.2.2

Seat front edge static load, clause 7.2.1


Seat height: highest position
Seat depth: foremost position

Test results:

Seat load N	Number of cycles	Back rest inclination mechanism	Remarks
1.600	10	F	No defects

Seat and back static load test, clause 7.2.2

Seat height: highest position
Seat inclination: horizontal
Back rest in height: highest position
Back rest in depth: rearmost position
Position of castors: perpendicular to the base arms
Tension of mechanism spring: medium




Test results:

Seat load N	Back force N	Number of cycles	Loading point	Back rest inclination mechanism	Remarks
1.600	530	5	A - B	Blocked	No defects
1.600	530	5	A - B	Unlocked	No defects

Note: according to EN 1335-3:2009 back force has been reduced from 560 N to 530 N to avoid tipping.

This document is validated by digital signature and time stamping in accordance with the Italian laws and the European Directives which regulate the electronic signature systems.


Managing Director
Dr. Andrea Giavon

The sample name and, when relevant, its description, are given by the orderer, and CATAS does not assume responsibility on this matter. This test report relates to the sample submitted for the test and no others. Additions, deletions or alterations are not permitted. This test report must always be reproduced in its entirety. Unless otherwise stated, sampling has been carried out by the orderer.

TEST REPORT
180503 / 5

Date received: 14/07/14
Date of test: 30/10/14
Date of issue: 28/11/14




CERANTOLA S.P.A.
VIA GIORGIONE 2-ZONA IND.LE
31037 RAMON DI LORIA (TV)
ITALIA

Sample name: FLASH swivel chair with mesh backrest

Seat and back durability - EN 1335-3:2009 AC:2009 - Clause 7.3.1

Seat and back durability clause 7.3.1

Seat height: highest position
Seat inclination: horizontal
Back rest in height: highest position
Back rest in depth: rearmost position
Position of castors: perpendicular to the base arms
Tension of mechanism spring: medium

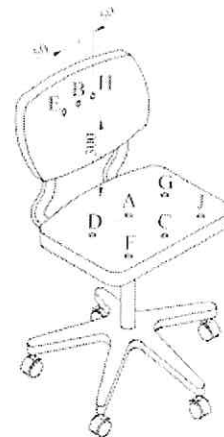

Test results:

Number of cycles	Loading point	Force N	Back rest inclination mechanism	Remarks
120.000	A	1.500	Locked	No defects
40.000	C B	1200 320	Locked	No defects
40.000	C B	1200 320	Unlocked	No defects
20.000	J E	1200 320	Unlocked	No defects
20.000	F H	1200 320	Unlocked	No defects
20.000	D G	1100 1100	Unlocked	No defects

This document is validated by digital signature and time stamping in accordance with the Italian laws and the European Directives which regulate the electronic signature systems.

Managing Director
Dr. Andrea Giavon

The sample name and, when relevant, its description, are given by the orderer, and CATAS does not assume responsibility on this matter. This test report relates to the sample submitted for the test and no others. Additions, deletions or alterations are not permitted. This test report must always be reproduced in its entirety. Unless otherwise stated, sampling has been carried out by the orderer.

TEST REPORT
180503 / 6

Date received: 14/07/14
 Date of test: 28/11/14
 Date of issue: 28/11/14



CERANTOLA S.P.A.
 VIA GIORGIONE 2-ZONA IND.LE
 31037 RAMON DI LORIA (TV)
 ITALIA

Sample name: FLASH swivel chair with mesh backrest

Stability EN 1335-3:2009 AC:2009, clause 7.1

Chairs with back rest inclination: no overturning with 13 discs of 10 Kg.

Positioning of chair components: as specified in Table 1 of EN 1335-3

Forwards overturning

Horizontal force : 20 N does not overturn

Front edge overturning

Horizontal force : 27 kg does not overturn

Rearwards overturning

Fixed back chair

Horizontal force : /

Chair with back rest inclination

Loading discs on the seat : 13 does not overturn

Sideways overturning for chairs with arms

Horizontal force : /

Sideways overturning for chairs without arms

Horizontal force : 20 N does not overturn

Forwards overturning for chairs with footrest

Horizontal force : /

This document is validated by digital signature and time stamping in accordance with the Italian laws and the European Directives which regulate the electronic signature systems.

Managing Director
 Dr. Andrea Giavon

The sample name and, when relevant, its description, are given by the orderer, and CATAS does not assume responsibility on this matter. This test report relates to the sample submitted for the test and no others. Additions, deletions or alterations are not permitted. This test report must always be reproduced in its entirety. Unless otherwise stated, sampling has been carried out by the orderer.

TEST REPORT

180503 / 7

Date received: 14/07/14
Date of test: 28/11/14
Date of issue: 28/11/14



CERANTOLA S.P.A.
VIA GIORGIONE 2-ZONA IND.LE
31037 RAMON DI LORIA (TV)
ITALIA

Sample name: FLASH swivel chair with mesh backrest

Rolling resistance of unloaded chair EN 1335-3:2009 AC:2009, clause 7.4

Rolling resistance of unloaded chair, clause 7.4

Type of castors: H
Test surface: steel floor
Test speed: 50 mm/s
Seat height: lowest position

Test results:

Measured resistance of castors N	Minimum allowed resistance N	Remarks
13,5 ± 0,8 *	12	No defects

*The result is the average of 3 measures

Unless otherwise specified, measurement uncertainty expanded to a confidence level of about 95% are ±2,0 N.

The measurement uncertainties stated in this document have been determined according to UNI CEI ENV 13005:2000. They were estimated as expanded uncertainty obtained multiplying the standard uncertainty by the coverage factor k corresponding to a confidence level of about 95%. Normally k=2.

This document is validated by digital signature and time stamping in accordance with the Italian laws and the European Directives which regulate the electronic signature systems.

Managing Director
Dr. Andrea Glavon

The sample name and, when relevant, its description, are given by the orderer, and CATAS does not assume responsibility on this matter. This test report relates to the sample submitted for the test and no others. Additions, deletions or alterations are not permitted. This test report must always be reproduced in its entirety. Unless otherwise stated, sampling has been carried out by the orderer.



31037 RAMON DI LORIA (TV) ITALY - Via Giorgione, 2 (z.i.)
Tel: +39.0423.755013 - Fax: +39.0423.755152 - R.E.A. TV 190527
Reg. Imp. TV n. 02143740260 - C. Id. IVA CEE n. IT 02143740260
Cap. Soc. € 120.000,00 I.v. - E-mail: info@cerantola.com
Web site: www.cerantola.com

ISTRUZIONI D'USO SEDIA FLASH MESH

Poltrona operativa per ufficio girevole per postazione con videoterminale. La poltrona prevede la regolazione in altezza di sedile e schienale, la regolazione dell'inclinazione dello schienale con manopola e bloccaggio a posizione desiderata oppure sbloccato a contatto permanente.

ISTRUZIONI D'USO:

- Regolazione in altezza del sedile con pistone a gas, tirando verso l'alto la leva del contatto permanente
- Sbloccaggio della regolazione in altezza dello schienale spingendo verso l'alto
- Per riportare lo schienale nella posizione più bassa, spingerlo fino alla massima altezza e quindi verso il basso

INFORMAZIONI GENERALI:

- Se la poltrona è prevista per uso a videoterminale gli angoli tra piede e polpaccio, polpaccio e coscia, coscia e schiena, avambraccio e spalla devono essere di circa 90°.
- Per l'utilizzo della sedia su pavimenti in linoleum o ricoperti da moquette o tappeti si consiglia l'uso di ruote rigide; per pavimenti in pietra dura, legno o piastrelle si consiglia l'uso di ruote morbide.

CONSIGLI DI MANUTENZIONE:

- Le parti rivestite in tessuto vanno pulite con una spazzola o un detergente delicato.
- Le parti rivestite con pelle naturale o artificiale devono essere pulite con un panno umido e morbido
- Tutte le parti devono essere pulite con una spazzola o con un panno umido
- EVITARE TASSATIVAMENTE l'uso di solventi o di detergenti chimici, poiché potrebbero alterare le caratteristiche estetiche e fisiche dell'articolo.

CONSIGLI DI SICUREZZA:

- Non salire in piedi sulla poltrona
- Non sedersi sulla spalliera o sui braccioli.
- Evitare il contatto con fonti di calore
- Il prodotto non è adatto ad uso esterno.
- Le sedie vanno movimentate dai braccioli

- Si consiglia di effettuare una periodica ispezione dei componenti
- Non inserire le mani nelle eventuali parti in movimento accessibili durante l'uso
- Non aprire la colonna a gas con la forza. Solo personale specializzato può sostituire o riparare la colonna a gas.

**La sedia rispetta i requisiti della norma En 1335-1 tipologia B